

DL05/06 Option Modules

Need to expand your DL05 or DL06?

Customize your DL05 or DL06 PLC to fit your application by adding option modules in the built-in slots. You can add these features without adding size. We offer the following option modules:

- Discrete I/O modules
- High-resolution analog I/O modules
- Ethernet communications modules
- Data Communications module
- High-Speed Counter module
- DeviceNet slave module
- Profibus slave module
- CoProcessor module



DL05 (only) Memory Module

Memory Module

D0-01MC <-->



DL05 flash memory

The standard DL05 PLC uses non-volatile flash memory to back-up the user program. Program data (V-memory) is backed by a super capacitor. If you need longer retention of program data, we recommend the D0-01MC. We also recommend the D0-01MC for applications that require transferring programs without a programming device or that require a real-time clock.

Simple and inexpensive

The D0-01MC slides easily into the option module slot in any DL05 PLC to back up PLC programs and data for extended periods of time.

Battery-backed RAM

The memory cartridge makes programs portable from one DL05 PLC to another. The memory map is identical to the internal memory in the DL05 PLC, so no program changes are necessary.

The on-board lithium battery lasts up to three years. If PLC power is lost and the battery is already dead, an on-board super capacitor backs up the memory four to seven days, allowing time to insert a new battery.

Real-time clock

Access the year, month, day of the week, hour, minute and second for event scheduling or data logging applications.

Operation

The D0-01MC installs into any of the DL05 PLCs. The MC module backs up all ladder and data in CMOS RAM.

The module's V-memory maps one-for-one to the PLC's memory locations. If the memory cartridge is inserted in the option slot, it automatically becomes the source of the controlling program.

You may choose to overwrite the PLC program, but it is not necessary. You can

transfer the program from the PLC to the module, or from the module to the PLC, or you can operate directly from the memory cartridge. By removing the module, you return control to the PLC's internal program.

Two pushbuttons on the face of the module initiate memory transfers. The pushbuttons are clearly marked to indicate the direction of the transfer, and an LED flashes to confirm the direction and success of the memory transfer.


A jumper enables/disables the write function in the D0-01MC. Write disable prevents overwriting of the module's memory. Write enable allows overwriting of the module's memory.

An LED alerts you to a low battery condition. If the battery drops below 2.5V the "BATT" LED comes on, and an internal bit is set. You can use the internal bit to activate alarm functions or to execute an orderly shutdown.

The date and time are easily set or accessed in the ladder logic program. Environmental specifications for the D0-01MC are the same as for the DL05 PLCs.

Accessories

DL05, DL06 and Option Module Accessories		
Part Number	Description	Price
D0-MC-BAT	Replacement battery for the D0-01MC memory option modules (DL05 only).	<--->
D2-BAT-1	Replacement RAM retentive memory backup battery for the DL06.	<--->
F0-IOCON	DL05 or DL06 replacement terminal blocks, 8-position, for the F0-04AD-1, F0-04AD-2, F0-2AD2DA-2, F0-4AD2DA-1, F0-4AD2DA-2 and H0-CTRIO option modules (qty. 2).	<--->
F0-IOCON-THM	DL05 or DL06 thermocouple option module replacement terminal block, quantity one.	<--->
D0-CBL	12ft. (3.66m) RS-232C shielded networking cable without RTS connections for DL05 or DL06 RJ12 networking ports. Enables direct networking of two PLCs.	<--->
D0-ACC-1	DL05 accessory pack includes one each of the I/O terminal block, I/O terminal block cover, and option slot cover.	<--->
D0-ACC-2	DL06 replacement terminal blocks (qty. 2), terminal block covers (qty. 2), terminal block labels (qty. 2) and short bar (qty. 1).	<--->
D0-ACC-3	DL06 replacement option module slot covers (qty. 4), DL06 top covers (qty. 4), LCD slot cover, and lower access panel cover.	<--->
D0-ACC-4	DL05 or DL06 discrete I/O option module replacement terminal blocks, includes 13-position (qty. 2) and 10-position (qty. 2).	<--->
D0-06ADPTR	DL06 15-pin high density D-sub vertical adapter for DL06 Port 2 serial communications port.	<--->
D2-FUSE-1	DL05 or DL06 F0-04TRS replacement fuse	<--->
ZL-CMA15	ZIPLink PLC communication adapter for 15-pin port	<--->
ZL-CMA15L	ZIPLink PLC communication adapter for 15-pin port with surge protection plus Power, Transmit, and Receive LED indicators	<--->

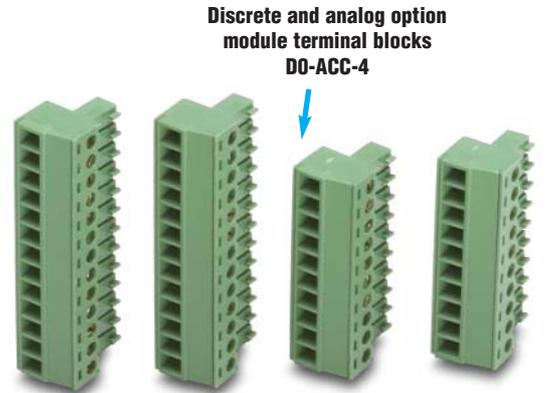

Discrete and analog option module terminal blocks
D0-ACC-4

DL05 option module slot cover, I/O terminal block, and I/O terminal block cover
D0-ACC-1



DL06 replacement option module slot covers, DL06 top covers, LCD slot cover, and lower access panel cover
D0-ACC-3



ZL-CMA15



ZL-CMA15L

DL06 replacement terminal blocks, terminal block covers, terminal block labels and short bar
D0-ACC-2



DL06 15-pin high density D-sub port adapter
D0-06ADPTR

See the Wiring Solutions section in this catalog for more information.